



TECHNICAL BULLETIN CS 2553ci/3253ci

SUBJECT:

BULLETIN INDEX

02/20/19

SUBJECT:

BULLETIN #

NEW MODEL PRODUCT INFORMATION1

TABLE OF CONTENTS

INTRODUCTION	1
GENERAL INFORMATION	1
DEALER LIMITED WARRANTIES FOR ECOSYS SERIES PRINTERS & MFP'S	2
WARRANTY RETURNS.....	3
PRODUCT TRAINING.....	3
SERVICE DOCUMENTATION	4
MAXIMUM MONTHLY VOLUME.....	4
MFP INFORMATION	4
ACCESSORY / OPTIONS	5
KEYBOARDS	5
SOLUTION SOFTWARE FOR PRINTING SYSTEM 15/EFI FIERY CONTROLLER.....	6
2553ci SUPPLY ITEMS, YIELDS & COST PER PAGE.....	7
3253ci SUPPLY ITEMS, YIELDS & COST PER PAGE.....	7
2553ci/3253ci MAINTENANCE KIT YIELDS & COST PER PAGE	7
MAINTENANCE KITS CONTENTS	8
BOARD REPAIR INFORMATION	9
COLOR PROFILES	9
FIRMWARE INFORMATION	10
MEMORY SPECIFICATIONS AND REFERENCE.....	10
2553ci/3253ci SPECIFICATIONS	11
2553ci/3253ci SPECIFICATIONS (CONTINUED).....	13
2553ci/3253ci SPECIFICATIONS (CONTINUED).....	14
DOCUMENT PROCESSORS.....	15
PF-7110 PAPER FEEDER SPECIFICATIONS	15
PF-7100 PAPER FEEDER SPECIFICATIONS	15
PF-7120 SIDE PAPER FEEDER SPECIFICATIONS.....	16
DF-7100 INNER FINISHER SPECIFICATIONS	16
PH-7100 PUNCH UNIT FOR INNER FINISHER	16
DF-7120 FINISHER SPECIFICATIONS	17
DF-7110 FINISHER SPECIFICATIONS	17
PH-7A PUNCH UNIT SPECIFICATIONS	18
MT-730(B) MAIL BOX SPECIFICATIONS.....	18
BF-730	18
JS-7100 INNER JOB FINISHER SPECIFICATIONS	19
BANNER GUIDE 10.....	19
FAX SYSTEM (12) SPECIFICATIONS.....	20
NETWORK FAX FUNCTIONS.....	20
BTU's	21
POWER CONSUMPTION	21
INSTALLATION REQUIREMENTS	22
WEIGHT AND DIMENSIONS	22
MACHINE SPACE REQUIREMENTS	22
UTILITIES	23
HyPAS BUSINESS APPLICATIONS SUPPORTED	23
PRINT DRIVERS	24
PRODUCT CONFIGURATOR.....	24
2553ci/3253ci PRODUCT CONFIGURATION	25
DIFFERENCES BETWEEN STANDARD IB-35 AND OPTIONAL IB-51.....	26



RECOMMENDED ACTION FOR FIELD MACHINES

- | | |
|-----------------------------------|--|
| ☐ AT SETUP | ☐ NEXT SERVICE CALL |
| ☐ NEXT PM | ☒ INFORMATION ONLY |

TECHNICAL BULLETIN CS 2553ci/3253ci

Bulletin # CS 2553ci/3253ci -01	Model CS 2553ci/3253ci	Date 02/20/19
Subject NEW MODEL PRODUCT INFORMATION		
This technical publication is confidential information that is the property of KYOCERA Document Solutions America, Inc. It is solely for the use of KYOCERA Document Solutions authorized dealers. This information may not be published, reproduced, sold, or copied in any media. Its unauthorized use is prohibited. Copyright © 2019 by KYOCERA Document Solutions America, Inc. All rights reserved.		

INTRODUCTION

Technical Services is pleased to announce the release of the 2553ci/3253ci/HyPAS Capable A3 Color MFP's. These models utilize a new 10.1 inch Color LED Touch Panel that improves operation capability and visibility. For those who still prefer Hard Keys, an optional Hard Key Pad mounts to the right side of the panel. The following additional security protocols have been added to enhance the MFP's platform stability.

- **Secure Boot** performs a comprehensive check to ensure Firmware, LINUX and Java platforms are at 100% integrity during start up.
- **Run time Integrity** checks are performed periodically to ensure the Firmware, including the Java Platform has not been compromised during the operation of the MFP.
- **Trusted Platform Module (TPM)** is a security chip set that applies a Cipher Key on the Kyocera Data Security Kit for an additional layer of protection for HyPAS applications, Address book, Logs, Image data, Document box and User lists.

Key Features are as follows:

- New Dual Scan Multi Feed Detection DP
- True 1200x1200dpi Print Resolution
- Standard WiFi Direct (IB-35)
- Optional Long Distance Wireless (IB-51)
- **Standard Data Security Kit (E)**
- 4GB Standard Memory (not upgradable)
- Standard 320GB HD + 8GB SSD
- OPC Drum
- AirPrint Capable
- Tiered Color Coverage Billing Capable



2553ci/3553ci



Optional Key Pad

GENERAL INFORMATION

Product Name	CS 2553ci/3253ci
Product Code	2VH/2VG
Product Training	Learning Center on CopyStarCentral
Diagnostic Center Contact Number	1-800-255-6482
CopyStarCentral Web Site	CopyStarCentral.com
CopyStarCentral Help Desk	dealersupport@da.kyocera.com
Kyocera Public Web Site	kyoceradocumentsolutions.com/
Kyocera Technical Support (Email)	support@da.kyocera.com
Safety Data Sheet (SDS)	Available on CopyStarCentral
National Processing Center (Customer Service)	1-866-596-2372 or customer_service@da.kyocera.com
National Training Center	training@da.kyocera.com

DEALER LIMITED WARRANTIES FOR ECOSYS SERIES PRINTERS & MFP'S

Copystar, a Division of KYOCERA Document Solutions America, Inc. ("Copystar") warrants its new Multifunctional Products (referred to herein as "MFP") to Authorized Dealers as follows:

Mainframes and Accessories. The MFP's mainframe and accessories are warranted against defects in workmanship and material under normal use and service for a period of 36 months from installation with first end-user, or 39 months from Copystar's invoice date to Dealer, or the specified number of copies/prints as listed below, whichever occurs first (referred to herein as "MFP Warranty Period"). Copystar's obligation hereunder is expressly limited to providing Dealer with the parts required to repair the MFP or crediting Dealer's account for the cost of said parts, at Copystar's election.

Maintenance Kits. Maintenance Kits consist of the developing unit, the drum unit, the transfer belt, and the fixing unit. Components of Maintenance Kits included with the original MFP are warranted against defects in material and workmanship for a period of 36 months from date of installation with first end-user, or 39 months from Copystar's invoice date to Dealer (referred to herein as Original Maintenance Kit Warranty Period), or the specified number of copies/prints listed below (referred to herein as Original Maintenance Kit Copy Allowance), whichever occurs first. Replacement Maintenance Kits purchased and installed after the Original Maintenance Kit Copy Allowance has expired, shall have a limited warranty for the specified number of copies/prints listed below, or until the Original Maintenance Kit Warranty Period expires, whichever occurs first. Replacement Maintenance Kits purchased and installed after the Original Maintenance Kit Warranty Period has expired shall have a limited warranty of 90 days. To be covered by this 90 day warranty, the Replacement Kit must be installed and registered prior to the MFP exceeding 10% of the Original Maintenance Kit Copy Allowance.

These warranties do not cover MFPs or components of Maintenance Kits which: (a) have become damaged due to operator negligence, misuse, accidents, improper storage or unusual physical or electrical stress, (b) have used parts or supplies which are not genuine Copystar brand parts or supplies, (c) have been installed or serviced by a technician not employed by Copystar or an Authorized Copystar Dealer, (d) have had the serial number modified, altered, or removed, or (e) Dealer fails to register the installation information for the MFP with Copystar utilizing **CopystarCentral**.

THESE WARRANTIES SHALL BE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. COPYSTAR SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY ARISE OUT OF THE USE OF, OR INABILITY TO USE, THE MFP.

MFP MODEL	COPIES/PRINTS	ORIGINAL MAINTENANCE KIT COPY/PRINT ALLOWANCE
3253ci	1,800,000	200,000/600,000
2553ci	1,800,000	200,000/600,000

WARRANTY RETURNS

To submit any Parts RETURN, simply log-on to our Order and Tracking System, go to Returns and request a Return Authorization. Select the appropriate Return Type.

To Process your Warranty Claim and verify other key information, the Maintenance Pages, Status Page, Service Status Page, Event Log & Image Quality Samples must be included if the item is to be returned to the National Return Center or Uploaded, if prompted to do so. If all of these are not Included or Uploaded with the Warranty Claim, your request may be delayed or denied.

To ensure quality, especially of new products, we will have parts returned on new product introductions for a period of approximately six months.

For assistance with the Parts Warranty Return System, please contact the Parts Warranty Help Line at 866-596-2372, Option 3.

PRODUCT TRAINING

Product Training	6053ci/6003i Series Online Update Training Course
Prerequisites	Previous 6052ci/6002i Classroom Training

Product Training for the New Color and B&W MFPs is offered as the 6053ci/6003i Series Online Update Training Course, available at the Learning Center on CopyStarCentral.

This Course will cover the updates and enhancements from previous models. **This update course is only available to those that have attended classroom training on the previous series (6052ci/6002i).**

Dealer Technicians, who do not meet the TASKalfa Classroom Training prerequisite, must take the following Online Courses.

- **Online - Color Theory 101**
- **Online - Using The Meter**
- **Online - Using The Logs**
- **Online - Using The Service Manual**
- **Online - Kyocera Copy Process**



Upon completion of the five online courses with a passing score, a Dealer Technician can sign up for a **Three Day** 6053ci/6003i Series Technical Classroom Training Course at your National Training Center.

The Dealership can place their first order for equipment after at least one Technician has completed the 6053ci/6003i Series Classroom Training Course with an overall score of 80% or higher.

SERVICE DOCUMENTATION

Description	Availability
2553ci/3253ci/3553ci/4053ci/5053ci/6053ci Service Manual, Accessories & Install Guides	Available on CopyStarCentral
2553ci/3253ci/3553ci/4053ci/5053ci/6053ci//4003i/5003i/6003i & Accessories Parts List	Available on CopyStarCentral
2553ci/3253ci/3553ci/4053ci/5053ci/6053ci KX Printer Driver User Guide	Available on CopyStarCentral
2553ci/3253ci/3553ci/4053ci/5053ci/6053ci Operation Guide	Available on CopyStarCentral
2553ci/3253ci/3553ci/4053ci/5053ci/6053ci Safety Guide	Included in the Box
File Management Utility Operation Guide Rev 1.2015.8	Available on CopyStarCentral
Fax System (12) Operation Guide	Available on CopyStarCentral
IB-50 Setup Guide	Available on CopyStarCentral
IB-50 Operation Guide (HTML format)	Available on CopyStarCentral
IB-50 Installation Instructions	Available on CopyStarCentral
IB-51 Web Browser Management Guide	Available on CopyStarCentral
IB-51 Installation Instructions	Available on CopyStarCentral
Kyocera Command Center RX User Guide Rev-7.2016	Available on CopyStarCentral
Kyocera NET Viewer User Guide Rev-5.4-2016.2	Available on CopyStarCentral
Kyocera NET Direct Print Operation Guide Rev-3.5	Available on CopyStarCentral
Kyocera NET ADMIN Operation Guide	Available on CopyStarCentral
PRESCRIBE Command Reference Operation Guide Rev-5.1	Available on CopyStarCentral
PRESCRIBE Technical Reference Operation Guide Rev-4.9	Available on CopyStarCentral
Data Security Kit (E) Operation Guide R2016.1	Available on CopyStarCentral
Card Authentication Kit (B) Operation Guide Rev 2013.1	Available on CopyStarCentral
UG-34 Installation Guide/Operation Guide	Available on CopyStarCentral
PCL Barcode Flash 3.0 User's Manual Rev 3.2.03.2013	Available on CopyStarCentral
PCL Barcode Flash Device Support and KYOmulticode Manual v2014.03.13	Available on CopyStarCentral
PCL Barcode Flash 3.0/KYOmulticode 1.0 Quick Installation Guide Rev-3.4.03.2013	Available on CopyStarCentral

MAXIMUM MONTHLY VOLUME

Model	Max Monthly Volume
2553ci	100,000 images
3253ci	125,000 images

MFP INFORMATION

ITEM	Part Number	Description
2553ci	1102VH2CS0	25/25ppm A3 Color MFP
3253ci	1102VG2CS0	32/32ppm A3 Color MFP

ACCESSORY / OPTIONS

ITEM	Part Number	Description
Document Processors		
DP-7130	1203SR6US0	270 Sheet Dual Scan Document Processor with multi-feed detection
DP-7110	1203R86US0	270 Sheet Dual Scan Document Processor
DP-7100	1203R76US0	140 Sheet Reversing Automatic Document Processor
DP-7120	1203RJ6US0	50 Sheet Reversing Automatic Document Processor
Paper Feeders		
PF-7120	1203RL2US0	3,000 Sheet Side Large Capacity Tray - Letter
PF-7100	1203RB2US0	Dual 500 Sheet Paper Trays
PF-7110	1203RC2US0	Dual 1,500 Sheet Paper Trays
Finishers and Related Options		
DF-7120	1203RV2US0	1,000 Sheet Finisher(requires AK-7110)
DF-7100	1203RD2US0	500 Sheet Internal Finisher
DF-7110	1203RW2US0	4,000 Sheet Finisher (requires AK-7110)
JS-7100	1203RN0UN0	Job Separator (Standard on 2553ci)
AK-7110	1703SZ0UN0	Attachment Kit for DF-7130 / DF-7120 / DF-7110
MT-730(B)	1203N00UN1	7 Bin Mailbox (requires DF-7110)
BF-730	1203ND0UN0	Booklet Folder (requires DF-7110)
PH-7100	1203RF2US0	Punch Unit for DF-7100
PH-7A	1203NK2US0	Punch Unit for DF-7110/7120
Connectivity		
Printing System (15)	1503RM0KL0	Fiery Print Controller for 3253ci only
Interface Kit (15)	1503RY0KL0	Required for Printing System (15)
Fax System 12	1503RK2US0	Fax Kit
Internet FAX Kit (A)	1703MC0UN0	Internet Fax Kit (Requires Fax System 12)
IB-50	1505JV0UN0	Gigabit Ethernet Board for Dual NIC
IB-51	1505J50UN0	Wireless LAN NIC (Long Communication Distance)
UG-33	1503NT0UN0	Thin Print Option
UG-34	1503NX0UN0	Optional Printer Emulation
Scan extension kit(A)	1603P10UN0	Searchable PDF Kit
Card Authentication Kit (B)	-----	See Separate Price List on CopyStarCentral for Options
Memory		
SDHC Card-16G	855D200647	16 Secure Digital Memory Card
SDHC Card-32G	855D200648	32 Secure Digital Memory Card
Miscellaneous		
DT-730(B)	1902LC0UN2	Original Hard Copy Holder
SH-10	1903JY0000	Staples for DF-7120 and BF-730 and DF-7100 (5,000pcs x3 cartridge/case)
SH-12	1903NB0UN0	Staples for DF-7110 (5,000pcs x 3 cartridge/case)
Keyboard Holder 10	1709AN0UN0	Holder for Keyboard
Banner Guide 10	1203RP0UN0	MPT Guide attachment to assist the feeding of banner paper
NK-7130	1903T00US0	External Numeric Keypad
Platen Cover Type E	1202H70UN0	Platen Cover
MFP Stand	855D200802	Stand
Stand Stabilizers	855D200803	It is recommended that the Stand Stabilizers be installed if the MFP is configured WITHOUT a Finisher or Side Deck.

KEYBOARDS

Adesso	ACK-595 USB	Other USB Keyboards may be compatible. Please check size of the Keyboard to ensure it fits on the DT-5100. Key Boards are available at CDW or other vendors who carry them.
Adesso	Wireless Keyboard WKB-3100ub	
Cherry Corp	Cherry keyboard ML4100PTAUS (USB)	

SOLUTION SOFTWARE FOR PRINTING SYSTEM 15/EFI FIERY CONTROLLER

Item	Item Number	Description	Dealer Price
EFI Color Profiler Suite V4 (incl'd ES-2000)	855D200732	EFI Color Profiler Kit, Includes ES-2000 (For Printing System 15)	\$2,580.00
EFI Color Profiler Suite V4 (incl'd ES-2000) with 3 Year Support	855D200733	EFI Color Profiler Kit, Includes ES-2000 (For Printing System 15 with 3 Year Software and EFI Phone Support)	\$3,342.07
EFI Color Profiler Suite V4 (incl'd ES-2000) with 5 Year Support	855D200734	EFI Color Profiler Kit, Includes ES-2000 (For printing System 15 with 5 Year Software and EFI Phone Support)	\$4,104.31
CPS SUPPORT AND MAINTENANCE CONTRACT	855D200735	1 Year EFI Color Profiler Kit Support	\$381.00
EFI Color Profiler Suite V4 (Software Only)	855D200736	EFI Color Profiler Suite V4 (Software Only)	\$1,773.64
EFI Color Profiler Suite V4 (Software Only) with 3 Year Support	855D200737	EFI Color Profiler Suite V4 with 3 Year Software upgrade Support only	\$2,535.88
EFI Color Profiler Suite V4 (Software Only) with 5 Year Support	855D200738	EFI Color Profiler Suite V4 with 5 Year Software upgrade Support only	\$3,298.09
EFI Hot Folder & Virtual Printer	855D200739	EFI Hot Folder & Virtual Printer. (For Printing System (15))	\$580.00
EFI SeeQuence Impose	855D200740	EFI SeeQuence Impose (For Printing System (15))	\$1,683.00
EFI Productivity Package	855D200741	Automate job processes to achieve maximum productivity & the right color	\$3,710.00
EFI SeeQuence Compose	855D200742	EFI SeeQuence Compose (For Printing System (15))	\$770.00
EFI SeeQuence Suite [Impose+Compose]	855D200743	EFI SeeQuence Suite [Impose+Compose] (For printing System (15))	\$2,100.00
System Software (15)	855D500102	KIT,SERVICE,GANDALF V1.0,PRINTING SYSTEM 15,ENGLISH,E300,KDC	\$137.70

2553ci SUPPLY ITEMS, YIELDS & COST PER PAGE

Description	Part Number	Toner Container Yield	Price	CPC
Toner TK-8349K	1T02L70CS0	Approx. 20k Yield @ 5% Coverage	\$63.40	0.00317
Toner TK-8349M	1T02L7BCS0	Approx. 12k Yield @ 5% Coverage	\$65.40	0.00545
Toner TK-8349C	1T02L7CCS0	Approx. 12k Yield @ 5% Coverage	\$65.40	0.00545
Toner TK-8349Y	1T02L7ACS0	Approx 12k Yield @ 5% Coverage	\$65.40	0.00545
WT-8500	1902ND0UN0	①Approx 40@ 5% Coverage	\$12.88	

① Waste Toner Bottle Yield based on a ratio of 30% Color/70% B/W

Waste Toner Bottles are not included with the Toner Container

Toner Price and Waste Bottle Price is based on case price for one piece.

3253ci SUPPLY ITEMS, YIELDS & COST PER PAGE

Description	Part Number	Toner Container Yield	Price	CPC
Toner TK-8339K	1T02RL0CS0	Approx. 25k Yield @ 5% Coverage	\$69.98	0.00279
Toner TK-8339M	1T02RLBCS0	Approx. 15k Yield @ 5% Coverage	\$72.15	0.00481
Toner TK-8339C	1T02RLCCS0	Approx. 15k Yield @ 5% Coverage	\$72.15	0.00481
Toner TK-8339Y	1T02RLACS0	Approx 15k Yield @ 5% Coverage	\$72.15	0.00481
WT-8500	1902ND0UN0	①Approx 40k@ 5% Coverage	\$12.88	

① Waste Toner Bottle Yield based on a ratio of 30% Color/70% B/W

Waste Toner Bottles are not included with the Toner Container

Toner Price and Waste Bottle Price is based on case price for one piece.

2553ci/3253ci MAINTENANCE KIT YIELDS & COST PER PAGE

Description	Part Number	Yield	Price	CPC
MK- 8335A Maintenance Kit	1702RL0UN3	200,000	\$116.00	0.00058
MK- 8335B Maintenance Kit	1702RL0UN0	200,000	\$348.00	0.00174
MK- 8335D Maintenance Kit	1702RL0UN1	600,000	\$872.00	0.00145
MK- 8335E Maintenance Kit	1702RL0UN2	600,000	\$253.32	0.000422

*** Maintenance Kits are not available for the Document Processors.**

*** Maintenance Kits are the same as Previous Models**

MAINTENANCE KITS CONTENTS

MK-8335A 200K

Description	Part Number	Quantity
DK-8350 DRUM UNIT	302L793050	1

MK-8335B 200K

Description	Part Number	Quantity
DK-8350 DRUM UNIT	302L793050	3

MK-8335D 600K

Description	Part Number	Quantity
RETARD ROLLER ASSY	302F909171	1
DV-8350K	302L793010	1
FK-8350	302L793064	1
PULLY FEED	302N406030	1
PARTS ROLLER RETARD ASSY SP	302ND94351	1
PARTS PULLEY FEED ASSY SP	302ND94380	1
PARTS PULLY PICKUP SP	302ND94340	1
FILTER TOP	302ND33250	1
TR-8550	302ND93152	1
ROLLER SECONDARY TRANSFER ASSY	302ND94180	1

MK-8335E 600K

Description	Part Number	Quantity
DV-8350M	302L793020	1
DV-8350C	302L793030	1
DV-8350Y	302L793040	1

Contents and Item Numbers are subject to change without notice

BOARD REPAIR INFORMATION

PCB NAME	NEW PCB P/N	REPAIR PCB P/N	REPAIR PRICE *
PARTS PWB ENGINE ASSY SP (2553ci/3253ci)	302VH94030	855RB00455	\$79.97
PARTS PWB MAIN ASSY US SP (2553ci/3253ci)	302VH94010	855RB00456	\$193.34
PARTS UNIT LOW VOLTAGE SP	302VH94070	855RB00457	\$63.51
PARTS UNIT HIGH VOLTAGE 100 SP	302L794150	855RB00373	\$44.84

*** Repair PCB Price includes credit issued after return of old Board.**

*** All Part Numbers and Pricing subject to change without notice.**

Defective PCB's being returned within the 3-Year warranty period must be returned to the **National Return Center** utilizing the **Parts Warranty Registration & Return System** on CopyStarCentral. Print out the Return Authorization form obtained through the system and return it with the Circuit Board for Credit. Any associated mounting brackets, hardware, system software and original packaging must be included with the claim. Credit will then be issued to your account.


For defective PCB's out of warranty, a Repair PCB must be ordered from the Parts Distribution Center. The dealer will be charged 100% of the New PCB price. The defective PCB can be returned using the **Online Repair Board Core Form** within 30 days of the Repair PCB invoice date. Upon receipt of the defective PCB at the National Return Center, the dealer will be credited 55% of the New PCB price. If a New PCB is ordered instead of a Repair PCB, credit will not be issued for the returned defective PCB.

COLOR PROFILES

Kyocera provides the option of registering two different Color Profiles on the MFP if the default Kyocera color reproduction does not meet your Customers needs.

A number of different Color Profiles are preloaded on the Standard Hard Drive. The Kyocera Color profile is the default for Copy/Print as Color Table 1. When Printing, the Print Driver Properties will show this setting under Color Reproduction "Printer Setting" shown on the Imaging tab. You can also overwrite the Kyocera profile if custom color reproduction is required as the default. You can add an additional Color Profile as Color Table 2, which is available by manually clicking the Color Reproduction dropdown and selecting "Custom Table" from the Printer Driver.

Select Copy > Imaging from the Panel to copy using a profile

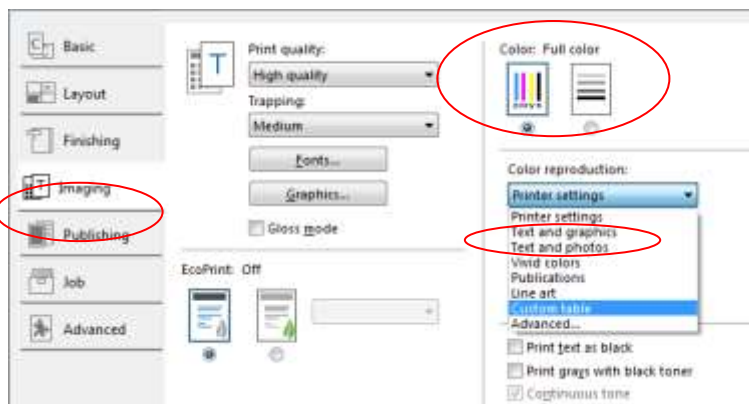

FIRMWARE INFORMATION

Firmware	Version	Upgrade Method	Availability
SOFTWARE CONTROLLER	2VG_S000.001.216	USB/Remote	Available on CopyStarCentral
SOFTWARE PANEL MAIN	2VG_7200.001.003		
SOFTWARE OCR DATA	2V8_L000.001.001		
SOFTWARE LANGUAGE MLT	2V8_81XM.001.026		
SOFTWARE ENGINE	2VG_1000.001.030		
SOFTWARE ENGINE-RFID	2KV_D100.003.001		
Firmware	Version	Upgrade Method	Availability
SOFTWARE DP-7130	3SR_9500.001.004	USB/Remote	Available on CopyStarCentral
SOFTWARE DP-7120	3RJ_9500.002.002		
SOFTWARE DP-7110	3R8_9500.005.001		
SOFTWARE DP-7100	3R7_9500.002.002		
SOFTWARE DF(1K/4K) MAIN	3RW_9200.006.001		
SOFTWARE PH MAIN	3NK_9A00.005.001		
SOFTWARE BF MAIN	3ND_9700.007.002		
SOFTWARE MT MAIN	3N0_9800.004.001		
SOFTWARE DF MAIN (Inner)	3RD_9200.004.001		
SOFTWARE PH MAIN (Inner Punch)	3RF_9A00.002.001		
SOFTWARE PF MAIN (500×2,1500×2)	3RB_9000.002.001		
SOFTWARE PF MAIN (3000sheets side deck)	3RL_9000.001.008		
SOFTWARE FAX	3R2_5400.003.012		
SOFTWARE COPY COLOR TABLE]	2VG_KZ00.001.005		
SOFTWARE MULTI COLOR TABLE	2VG_GZ00.001.005		

Technical Services recommends checking Firmware Versions at Setup and Upgrade to the latest Versions available on CopyStarCentral.

FIERY FIRMWARE INFORMATION

Type	Program No.	VER.	Remarks	
Printing System15	FIT101911090	FIT101911090	Patch file for the FIERY	Update

Printing System 15 requires a Firmware Patch. When setting up the Fiery, be sure to set it for Automatic updates. In addition, If DNS is not configured, the Fiery patch will not update.

MEMORY SPECIFICATIONS AND REFERENCE

These devices are standard-equipped with 4GB of built-in on board Memory. A 320GB Hard Drive and 8GB SSD standard.

Model	Standard	Optional	Maximum
2553ci/3253ci	4GB of built-in onboard Memory Hard Drive 320GB + 8GB SSD	Not upgradable	4GB of Memory Hard Drive 320GB + 8GB SSD
The Standard 8GB SSD is used for improved response time from Warm-up and Recovery from Sleep. There is no Fax System Memory Option. The Fax System uses 170MB of the 8GB SSD for page storage, etc. Memory Reception supports 7,000 sheets or more.			

2553ci/3253ci SPECIFICATIONS

Items		Specifications
Type		Desktop
Printing method		Electrophotography by semiconductor laser
Paper weight	Cassette	52 to 300 g/m ² , 14lb. Bond - 166lb. Index
	MP tray	52 to 300 g/m ² , 14lb. Bond - 166lb. Index
Media type	Cassette	Plain, Rough, Vellum, Recycled, Preprinted, Bond, Cardstock, Color, Prepunched, Letterhead, Envelope, Thick, High Quality, Custom (Duplex: Same as Simplex)
	MP tray	Plain, Transparency (OHP film), Rough, Vellum, Labels, Recycled, Preprinted, Bond, Cardstock, Color, Prepunched, Letterhead, Envelope, Thick, High Quality, Coated, Index Tab Dividers, Custom 1 to 8
Paper size	Cassette1	A4, A5, A6, B5, B6, Letter, Legal, Statement, Executive, Oficio II, Folio, 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Hagaki, Ofukuhagaki, Kakugata 2, Yokei 4, Yokei 2, Chokei 3, Custom 1 to 4 (98 x 148 to 297 x 356 mm)
	Cassette 2	A3, A4, A5, A6, B4, B5, B6, 216x340 mm, SRA3, Ledger, Letter, Legal, Statement, Executive, 12x18", Oficio II, Folio, 8K, 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Envelope C4, Hagaki, Ofukuhagaki, Kakugata 2, Yokei 4, Yokei 2, Chokei 3, Custom 1 to 4 (98 x 148 to 320 x 457 mm)
	MP tray	A3, A4, A5, A6, B4, B5, B6, 216 x 340 mm, SRA3, Ledger, Letter, Legal, Statement, Executive, 12 x 18", Oficio II, Folio, 8K, 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Envelope C4, Hagaki (Cardstock), Ofukuhagaki (Return postcard), Yokei 4, Yokei 2, Yonaga 3, Chokei 3, Chokei 4 Custom 1 to 4 (98 x 148 mm to 320 x 457 mm) 1 sheet (Banner sheet (10 x 488.1 to 304.8 x 1,219 mm / 8.26" x 19.22" to 12" x 48"))
Printable Area		Print margin for top, bottom and both sides is 4 mm
Warm-up time (22 °C/71.6 °F, 60% RH)	Power on	25 ppm model: 18 seconds or less 32 ppm model: 18 seconds or less
	Low Power	25 ppm model: 10 seconds or less 32 ppm model: 10 seconds or less
	Sleep	25 ppm model: 16 seconds or less 32 ppm model: 16 seconds or less
Paper capacity	Cassette	550 sheets (64g/m ²) 17lb. 500 sheets (80g/m ²) 20lb
	MP tray	165 sheets (A4/Letter or smaller) (64 g/m ²) 17lb. 150 sheets (larger than A4/Letter) (80 g/m ²) 20lb. 55 sheets (A4/Letter or smaller) (64 g/m ²) 17lb 50 sheets (larger than A4/Letter) (80 g/m ²) 20lb.
		1 sheet (Banner sheet (210 x 470.1 to 304.8 x 1,220 mm / 8.26" x 18.5" to 12" x 48")) (136 to 163 g/m ²)
Output tray capacity	Inner Tray	500 sheets (80 g/m ²), 20lb
	Job Separator	100 sheets (80 g/m ²), 20lb
Image write system		Semiconductor laser and electrophotography
Light Source		LED array
Scanning Method		Flat surface scanning by the CCD image sensor

Items		Specifications
Photoconductor		25 ppm model: OPC drum (diameter 30 mm) 32 ppm model: OPC drum (diameter 30 mm)
Charging system		Contact Charger roller method
Developer system		25 ppm model: Non-magnetic dual-component developing system 32 ppm model: Non-magnetic dual-component developing system Toner replenishing: Automatic from the toner container
Transfer system		Primary: Transfer belt method Secondary: Transfer roller method
Separation system		Small diameter separation and separation needle (Input DC voltage)
Cleaning system	Drum	25 ppm model: Counter blade 32 ppm model: Counter blade
	Primary transfer	Fur brush cleaning + Pre-brush system
Charge erasing system		Exposure by cleaning lamp (LED)
Fusing system		Sliding IH fuser system Heat source: IH Abnormally high temperature protection devices: thermostat
Main memory		4GB (not upgradable)
High Capacity Storage		SSD 8 GB / Hard Disk 320 GB
Interface	Standard	USB Interface Connector: 1 (Hi-Speed USB) *3 Network interface: 1 (1000 BASE-T/100 BASE-TX/10 BASE-T (IPv6, IPv4, IPSec), 802.3az supported) Hi-Speed USB: 4 (USB Flash memory slot) Wireless LAN: 1 *4
	Option	eKUIO: 2 *2 Fax: 2 *3, Supports Dual Fax
Operating environment	Temperature	10 to 32.5 °C/50 to 90.5 °F
	Humidity	10 to 80% RH
	Altitude	3,500 m/11,482 ft or less
	Brightness	1,500 lux or less
Dimensions (W × D × H)		23.71" × 26.19" × 31.11"
Weight (without toner container)		25/32 ppm model: Approx. 198.4 lbs (without toner container)
Space required (W × D)		36.23" × 26.19" (Using multipurpose tray)
Power source		120 V 60 Hz 12 A
Noise Levels Measurement method : According to ISO7779 / ISO3744		Standby mode 35 dB(A) 25/32ppm model B&W (Main Unit Only) Copying/Printing mode 63 dB(A) 25/32ppm model Color (Main Unit Only) Copying/Printing mode 64 dB(A)

*1: Up to upper limit height line in the cassette.

*2: When two optional interfaces are installed, a fax system cannot be installed.

*3: When IB-50 or IB-51 is installed, only one fax system can be installed.

*4 This is standard for North America.

2553ci/3253ci SPECIFICATIONS (continued)

Copy Function:

Item		Specifications		
			Black and White Copying	Full Color Copying
Copying Speed	2553ci	A4/Letter	25 sheets/min	25 sheets/min
		A4-R/Letter-R	17 sheets/min	17 sheets/min
		A3/Ledger	12 sheets/min	12 sheets/min
		B4	15 sheets/min	15 sheets/min
		Legal	15 sheets/min	15 sheets/min
		B5	25 sheets/min	25 sheets/min
		B5-R	17 sheets/min	17 sheets/min
		A5-R	12 sheets/min	12 sheets/min
		A6-R	12 sheets/min	12 sheets/min
	3253ci	A4/Letter	32 sheets/min	32 sheets/min
		A4-R/Letter-R	22 sheets/min	22 sheets/min
		A3/Ledger	16 sheets/min	16 sheets/min
		B4	19 sheets/min	19 sheets/min
		Legal	19 sheets/min	19 sheets/min
		B5	32 sheets/min	32 sheets/min
		B5-R	22 sheets/min	22 sheets/min
		A5-R	16 sheets/min	16 sheets/min
		A6-R	16 sheets/min	16 sheets/min
First print time (A4, feed from cassette)	B/W	25 ppm model: 6.4 seconds or less 32 ppm model: 5.3 seconds or less		
	Color	25 ppm model: 8.5 seconds or less 32 ppm model: 7.0 seconds or less		
Zoom Level		Manual mode: 25 to 400%, 1% increments Auto Mode: Preset Zoom		
Continuous copying		1 to 9999 sheets		
Resolution (Scanning)	Table	Black and White	600x600 dpi	
		Color	600x600 dpi	
	DP	Black and White	600x600 dpi/600x300 dpi	
		Color	600x600 dpi	
Resolution		1,200 x 1,200 dpi (multi-bit)		
Supported Original Types		Sheet, Book, 3-dimensional objects (maximum original size: Legal/Folio)		
Original feed system		Fixed		

2553ci/3253ci SPECIFICATIONS (continued)

Printer Function:

Item		Specifications		
Printing Speed	25ppm 32ppm	Same as Copying Speed		
		12×18"/SRA3 12×18"/SRA3	Black and White Copying	Full Color Copying
			12 sheets/min 16 sheets/min	12 sheets/min 16 sheets/min
First Print Time	B/W	25 ppm model: 7.0 seconds or less 32 ppm model: 5.9 seconds or less		
	Color	25 ppm model: 9.2 seconds or less 32 ppm model: 7.7 seconds or less		
Resolution	UI Name	Resolution (data)	Resolution (print)	
	600 dpi	600 dpi	4,800 dpi (Equivalent) x 1,200 dpi	
	1200 dpi	1200 dpi	4,800 dpi (Equivalent) x 1,200 dpi	
Operating system		Windows 7, Windows 8.1, Windows 10, Windows Server 2008/R2, Windows Server 2012/R2, Windows Server 2016, Mac OS X v10.9 or later		
Interface		Super-Speed USB: 1 Network interface: 1 (1000 BASE-T/100 BASE-TX/10 BASE-T (IPv6, IPv4, IPsec), 802.3az supported) Optional Interface (Option): 2 (For IB-50/IB-51 installation) Wireless LAN (Standard)		
Page description language		PRESCRIBE		
Emulations		PCL6 (PCL-XL, PCL5c), KPDL3 (PostScript3 compatible), PDF, XPS, Open XPS		

Scanner Function

Scanner Function		Specifications	
Resolution		600 dpi × 600 dpi, 400 dpi × 400 dpi, 200 dpi × 400 dpi, 300 dpi × 300 dpi, 200 dpi × 200 dpi, 200 dpi × 100 dpi	
File format		TIFF, JPEG, XPS, Open XPS, PDF MMR/JPEG compression/High compressive PDF/OCR Text Recognition PDF (Option)	
Scanning Speed (A4 landscape, 300 dpi, Image quality: Text/Photo original)	2553ci/3253ci	DP-7110*1	1-sided: B/W 80 Images/min, Color 80 Images/min 2-sided: B/W 160 Images/min, Color 160 Images/min
		DP-7100	1-sided: B/W 80 images/min, Color 80 Images/min 2-sided: B/W 48 Images/min, Color 48 Images/min
		DP-7120	1-sided: B/W 48 images/min, Color 48 Images/min 2-sided: B/W 15 Images/min, Color 15 Images/min
		DP-7130	1-sided: B/W 100 images/min, Color 100 Images/min 2-sided: B/W 180 Images/min, Color 180 Images/min
Interface		Ethernet (10 BASE-T/100 BASE-TX/1000BASE-T) , USB	
Transmission system		SMB, SMTP, FTP, FTP over SSL, USB, TWAIN *2, WIA *3, WSD	

*1 When using the document processor (Dual Scan DP) (except TWAIN and WIA scanning).

*2 Operating System: Windows Server 2008/Windows Server 2008 R2/Windows 7/Windows 8.1/Windows 10/Windows Server 2012/Windows Server 2012 R2/Windows Server 2016

*3 Operating System Windows Server 2008/Windows Server 2008 R2/Windows 7/Windows 8.1/Windows 10/Windows Server 2012/Windows Server 2012 R2/Windows Server 2016

DOCUMENT PROCESSORS

Item	Specifications		
	DP-7100	DP-7120	DP-7110/DP-7130
Document feed method	Automatic feed		
Supported original types	Sheet originals		
Paper sizes	Maximum A3/Ledger (297 × 432 mm) (Long-sized: 297 × 1,900 mm)		
	Minimum: A6-R/Statement-R (105 × 148 mm)	Minimum: A5-R/Statement-R (140 × 182 mm)	Minimum: A6-R/Statement-R (105 × 148 mm)
Paper weights	1-sided: 35 to 160 g/m ² 2-sided: 50 to 120 g/m ² ,.	1-sided: 45 to 160 g/m ² 2-sided: 50 to 120 g/m ² ,	1-sided: 35 to 220 g/m ² 2-sided: 50 to 220 g/m ² ,
Loading capacity	140 sheets maximum (50 to 80 g/m ²)*1	50 sheets maximum (50 to 80 g/m ²)*1	270 sheets maximum (50 to 80 g/m ²)*1
Dimensions (WxDxH)	23.35" × 20.91" × 5.46"	23.35" × 20.91" × 5.46"	23.62" × 21.22" × 7.28"
	Approx. 9 kg / Approx. 19.9 lbs	Approx. 9 kg / Approx. 16.53 lbs	Approx. 30.4 lbs

*1 Up to upper limit height line in the document processor

PF-7110 PAPER FEEDER SPECIFICATIONS

Item	Specifications
Paper Supply Method	Friction roller feeder (No. Sheets: 1,750, 64 g/m ² , 2 Cassette/ No. Sheets: 1,500, 80 g/m ² ,. 2 Cassette)
Paper Size	A4, B5, Letter
Supported Paper	Paper weight: 52 to 300 g/m ² Media types: Plain, Recycled Material
Dimensions (W × H × D)	23.63" × 26.19" × 12.73"
Weight	Approx. 66.2 lbs

PF-7100 PAPER FEEDER SPECIFICATIONS

Item	Specifications
Paper Supply Method	Friction roller feeder (No. Sheets: 550, 64 g/m ² ,. 2 Cassette/ No. Sheets: 500, 80 g/m ² ,. 2 Cassettes)
Paper Size	A3, A4, A5, A6, B4, B5, B6, 216 × 340 mm, SRA3, Ledger, Letter, Legal, Statement, Executive, 12 × 18", Oficio II, Folio, 8K, 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Envelope C4, Hagaki (Cardstock), Oufuku Hagaki (Return postcard), Youkei 4, Youkei 2, Custom 1 to 4 (98 × 148 mm to 320 × 457 mm)
Supported Paper	Paper weight: 52 to 300 g/m ² Media types: Plain, Recycled Material
Dimensions (W × H × D)	23.27" × 20.36" × 39.58"
Weight	Approx. 50.8 lbs

PF-7120 SIDE PAPER FEEDER SPECIFICATIONS

Item	Specifications
Paper Supply Method	Friction roller feeder (No. Sheets: 3,500 64 g/m ² . No. Sheets: 3,000 80 g/m ²).
Paper Size	A4, B5, Letter
Supported Paper	Paper weight: 52 to 300 g/m ² Media types: Plain, Recycled Material
Dimensions (W × H × D)	23.27" × 20.36" × 39.58"
Weight	Approx. 66.2 lbs

DF-7100 INNER FINISHER SPECIFICATIONS

Item	Specifications
Number of Trays	1 Tray
Paper Size(80 g/m ²) Finisher tray (no stapling)	A3, A5-R, B4, B5-R, B6-R, 216×340 mm, SRA3, Ledger, Legal, Statement-R, Executive, 12×18", Oficio II, Folio, 8K, 16K-R: 500 sheets A4-R, A4, B5, Letter-R, Letter, 16K: 1,000 sheets
Paper Weight	Staple: 90 g/m ²
Stapling	Number of sheets to limit
	A3, B4, B5-R, 216×340 mm, Ledger, Legal, 12×18", Oficio II, 16K-R, 8K
	A4-R, A4, B5, Letter-R, Letter, 16K
Media types	30 sheets (52 to 105 g/m ²) 2 cover sheet only (106 to 300 g/m ²)
	50 sheets (52 to 90 g/m ²) 40 sheets (91 to 105 g/m ²) 2 cover sheet only (106 g/m ² to 300 g/m ²)
	Plain, Recycled, Prepunched, Preprinted, Bond, Letterhead, Color, Coated, Thick, High Quality, Custom 1 to 8
Dimensions (W × H × D)	27.36" × 20.99" × 8.69" (When tray is extended)
Weight	Approx. 25.4 lbs or less

PH-7100 PUNCH UNIT FOR INNER FINISHER

Item	Specifications
Paper Size	A3, A4-R, A4, A5-R, B4, B5-R, B5, Ledger, Letter-R, Letter, Legal, Statement-R, 12×18", Folio, 8K, 16K-R, 16K
Paper Weight	52 to 300 g/m ²
Media Type	Plain, Preprinted, Bond, Recycled, Letterhead, Color, Thick, Coated, High Quality, Custom 1 to 8

DF-7120 FINISHER SPECIFICATIONS

Item		Specifications	
Number of Trays		1 Tray	
Paper Size (80 g/m ²) 20lb. Tray A (no stapling)		A3, A5-R, B4, B5-R, B6-R, 216×340 mm, SRA3, Ledger, Legal, Statement-R, Executive, 12×18", Oficio II, Folio, 8K, 16K-R: 500 sheets A4-R, A4, B5, Letter-R, Letter, 16K: 1,000 sheets	
Paper weight		Stapling: 90 g/m ² or less	
Stapling	Number of sheets to limit	A3, B4, B5-R, 216×340 mm, Ledger, Legal, 12×18", Oficio II, 16K-R, 8K	30 sheets (52 to 105 g/m ²) 2 cover sheet only (106 to 300 g/m ²)
		A4-R, A4, B5, Letter-R, Letter, 16K	50 sheets (52 to 90 g/m ²) 40 sheets (91 to 105 g/m ²) 2 cover sheet only (106 g/m ² to 300g/m ²)
	Media types	Plain, Recycled, Prepunched, Preprinted, Bond, Letterhead, Color, Coated, Thick, High Quality, Custom 1 to 8	
Dimensions (W × H × D)		548 × 618.5 × 1,050 mm / 21.58" × 24.36" × 41.34"	
Weight		Approx. 66.2 lbs. or less	
Space Required (W × D)		26.23" × 24.36" (with the tray pulled out)	

DF-7110 FINISHER SPECIFICATIONS

Item		Specifications	
Number of Trays		2 Trays	
Paper Size (80 g/m ²) 20lb.	Tray A (Non-Stapling)	A3, B4, B5-R, 216×340 mm, SRA3, Ledger, Legal, Executive, 12×18", Oficio II, Folio, 8K, 16K-R: 1,500 sheets A5-R, B6-R, Statement-R: 500 sheets A4-R, A4, B5, Letter-R, Letter, 16K: 4,000 sheets A5-R, B6-R, Statement-R: 500 sheets	
	Tray B	A3, A4-R, A4, A5-R, A6-R, B4, B5-R, B5, B6-R, 216×340 mm, SRA3, Ledger, Letter-R, Letter, Legal, Statement-R, Executive, 12×18", Oficio II, Folio, 8K, 16K-R, 16K, ISOB5, Cardstock, Oufuku hagaki (Return postcard), Youkei 4, Youkei 2: 200 sheets	
Paper Weight		Stapling: 90 g/m ² or less	
Stapling	Number of sheets to limit	A3, B4, B5-R, 216×340 mm, Ledger, Legal, 12×18", Oficio II, 16K-R, 8K	30 sheets (52 to 105 g/m ²) 2 cover sheet only (106 g/m ² to 300g/m ²)
		A4-R, A4, B5, Letter-R, Letter, 16K	70 sheets (52 to 74 g/m ²) 65 sheets (75 to 90 g/m ²) 55 sheets (91 to 105 g/m ²) 2 cover sheet only (106 g/m ² to 300g/m ²)
	Media types	Plain, Preprinted, Bond, Recycled, Letterhead, Color, Prepunched, Thick, Coated, High Quality, Custom 1 to 8	
Dimensions (W × H × D)		607.2 × 668.5 × 1,061.3 mm / 23.27" × 20.36" × 39.58"	
Weight		Approx. 88.18 lbs. or less	
Space Required (W × D)		26.23" × 24.36" (with the tray pulled out)	

PH-7A PUNCH UNIT SPECIFICATIONS

Item	Specifications
Paper Size	A3, A4-R, A4, A5-R, B4, B5-R, B5, Ledger, Letter-R, Letter, Legal, Statement-R, 12×18", Folio, 8K, 16K, 16K-R
Paper Weight	45 to 300 g/m ²
Media Type	Plain, Preprinted, Bond, Recycled, Letterhead, Color, Thick, Coated, High Quality, Custom 1 to 8

MT-730(B) MAIL BOX SPECIFICATIONS

Item	Specifications
Number of Trays	7 Tray
Paper Size (80 g/m ²)	A3, B4, Ledger, Legal, 8K: 50 sheets A4-R, A4, A5-R, B5-R, B5, 216×340 mm, Letter-R, Letter, Statement-R, Executive, Oficio II, Folio, 16K-R, 16K: 100 sheets
Dimensions (W × H × D)	20.08" × 15.75" × 18.51"
Weight	Approx. 22.1 lbs. or less

BF-730

Item		Specifications
Adaptable Sizes for folding	Bi-Fold	A3, B4, A4-R, Ledger, Legal, Letter-R, Oficio II, 8K
	Saddle Stitch	A3, B4, A4-R, Ledger, Legal, Letter-R, Oficio II, 8K
	Tri-Fold	A4-R, Letter-R
Adaptable number for folding	Bi-Fold	5 sheets (60 to 90 g/m ²) 3 sheets (91 to 120 g/m ²) 1 sheets (121 to 256 g/m ²)
	Saddle Stitch	20 sheets (60 to 90 g/m ²) 13 sheets (91 to 105 g/m ²) 1 cover sheet only (106 g/m ² or heavier)
	Tri-Fold	5 sheets (60 to 90 g/m ²) 3 sheets (91 to 120 g/m ²)
Maximum Number for Stack (80 g/m ²)	Bi-Fold	5 sheets or less per set: 30 sets or more 6 to 10 sheets per set: 20 sets or more 11 to 16 sheets per set: 10 sets or more
	Saddle Stitch	5 sheets or less per set: 30 sets or more 6 to 10 sheets per set: 20 sets or more 11 to 16 sheets per set: 10 sets or more
	Tri-Fold	1 sheet per set: 30 sets or more 2 to 5 sheets per set: 5 sets or more

JS-7100 INNER JOB FINISHER SPECIFICATIONS

Item	Specifications
Number of Trays	1 Tray
Loadable sheets limit (80g/m ²)	100 Sheets
Paper Size(80 g/m ²)	A3, A4-R, A4, A5-R, A5, A6-R, B4, B5-R, B5, B6-R, 216×340 mm, SRA3, Ledger, Letter-R, Letter, Legal, Statement-R, Executive, 12×18", Oficio II, Folio, 8K, 16KR, 16K, ISO B5, Envelope #10, Envelope #9, Envelope #6, Envelope Monarch, Envelope DL, Envelope C5, Envelope C4, Hagaki (Cardstock), Oufuku hagaki (Return postcard), Youkei 4, Youkei 2, Custom (98 × 148 to 304.8 × 1,220 mm)
Supported Paper	Paper weight: 52 to 300 g/m ² Media types: Plain, Recycled, Material
Dimensions (W × H × D)	18.78" × 16.52" × 2.52"
Weight	Approx. 1.6 lbs. or less

BANNER GUIDE 10

Item	Specifications
Max. number of sheets	10 sheets (Multi Purpose tray)
Paper width	210 to 304.8 mm (8.26" to 12")
Paper length	Max. 1220.0 mm (48")
Supported Paper	Paper weight: 136 to 163 g/m ² Media types: Heavy 2
Dimensions (W × H × D)	15.78" × 15.67" × 7.63"
Weight	Approx. 1.6 lbs. or less

FAX SYSTEM (12) SPECIFICATIONS

Item	Specifications
Compatibility	G3
Communication line	Subscriber telephone line
Transmission time	3 s or less (33600 bps, JBIG, ITU-T A4 #1 chart)
Transmission speed	33600/31200/28800/26400/24000/21600/19200/16800/14400/12000/9600/7200/4800/2400 bps
Coding scheme	JBIG/MMR/MR/MH
Error correction	ECM
Original Paper Size	Max. Width: 297 mm/11", Max. length: 1,600 mm/63"
Number of originals to auto feed	Max. 270 sheets (with dual scan document processor)
Scanner resolution	Horizontal × Vertical 200 × 100 dpi Normal (8 dot/mm × 3.85 line/mm) 200 × 200 dpi Fine (8 dot/mm × 7.7 line/mm) 200 × 400 dpi Super fine (8 dot/mm × 15.4 line/mm) 400 × 400 dpi Ultra fine (16 dot/mm × 15.4 line/mm) 600 × 600 dpi Print: 1200 × 1200 dpi
Gradations	256 shades (Error diffusion)
One-Touch key	1,000 keys
Multi-Station transmission	Max. 500 destinations (Maximum number of stations: 500, maximum of 100 stations for i-Fax)
Memory reception	7000 sheets or more (when using ITU-T A4 #1)
Image memory	Standard memory (170MB) (for FAX transmission/reception) Not upgradable
Report output	Send result report, FAX RX result report, Activity report, Status page
Option	Multi port, Internet FAX kit, Supports Dual Fax

NETWORK FAX FUNCTIONS

Item	Specifications
Hardware	IBM PC-AT compatible computer
Interface	10 BASE-T, 100 BASE-TX, 1000 BASE-T
Operating system	Windows XP, Windows Server 2003, Windows Server 2008/R2, Windows Server 2012/R2, Windows Vista, Windows 7, Windows 8, Windows 8.1 and Windows 10 Windows Server 2012
Transmission Resolution	Ultra fine (400 × 400dpi), Fine (200 × 200dpi), Normal (100 × 200dpi), 600 × 600dpi
Document Size	Letter, Legal, Ledger (11 × 17), Statement, A3, A4,A5, Folio, B4, B5(JIS)
Scheduled job	Time setting by Network FAX driver (within 24 hours, 1 minute increments)
Transmit and Print	Fax transmission and print out at the machine is available
Broadcast Transmission	Max. 500 destinations (Maximum number of stations: 500, maximum of 100 stations for i-Fax)
User Login/Job Accounting	If "User Login" is set in main unit, Login User Name and Password have to be registered by the Network FAX Driver setting. If "Job Accounting" is set in main unit, Account ID has to be registered by the Network FAX Driver setting.
Cover Page	A format can be selected using the Network FAX Driver or a template can be created.

All Specifications subject to change without notice.

BTU's

Model	Power Consumption		PPM	Prints/Hr	Watts based on PPM & Pr/Hr	Watts based on PPM & Pr/Hr	kW/hour	Total BTU (*3421.14)
	Total Print (W)	Total Ready (W)			Print	Ready		
2553ci	530	50	25	500	176.7	33.3	0.2100	716.5
	530	50	25	1,000	353.3	16.7	0.3700	1262.5
	530	50	25	1,500	530.0	0.0	0.5300	1808.4
3253ci	610	50	32	500	158.9	37.0	0.1958	668.2
	610	50	32	1,500	476.6	10.9	0.4875	1663.4
	610	50	32	1,920	610.0	0.0	0.6100	2081.4

*** Total BTU's are based on Prints per Minute, Prints per Hour. Watts are based on PPM & Pr/Hr and Kw/Hour.**

POWER CONSUMPTION

Specification		Main Body
Voltage requirements	US/Canada	120 V AC $\pm 10\%$, 60Hz $\pm 2\%$, 12A
3253ci Standard Configuration	Maximum	1650W
	Plug-in off mode	0.1W
	Off mode	0.2W
	Sleep Mode	0.7W
	Sleep Mode Excluding default settings	7W
	Low Power Mode	50W
	Ready mode	50W
	Copy/Print mode	610W
Voltage requirements	US/Canada	120 V AC $\pm 10\%$, 60Hz $\pm 2\%$, 12A
2553ci Standard Configuration	Maximum	1650W
	Plug-in off mode	0.1W
	Off mode	0.2W
	Sleep Mode	0.7W
	Sleep Mode Excluding default settings	7W
	Low Power Mode	50W
	Ready mode	50W
	Copy/Print mode	530W
 NEMA 5-15R		


INSTALLATION REQUIREMENTS

Installation Time	15 Minutes or less
Temperature Range	50°F ~ 90°F (10°C ~ 32.5°C)
Humidity Range	15% ~ 80%RH
Condensation and Humidity	Rapid Temperature change, Humidity drift, and condensation should be avoided
Altitude	3,500 m/11,482 ft or less
Illumination	Maximum 1,500 lux
Levelness	Maximum levelness: 5mm (0.2inch) The MFP must be placed on a level and a sturdy surface

WEIGHT AND DIMENSIONS

Specification	2553ci/3253ci
Width	23.71"
Height	31.11"
Depth	26.19"
Weight (Main unit)	209.4 lbs (without toner container)

MACHINE SPACE REQUIREMENTS

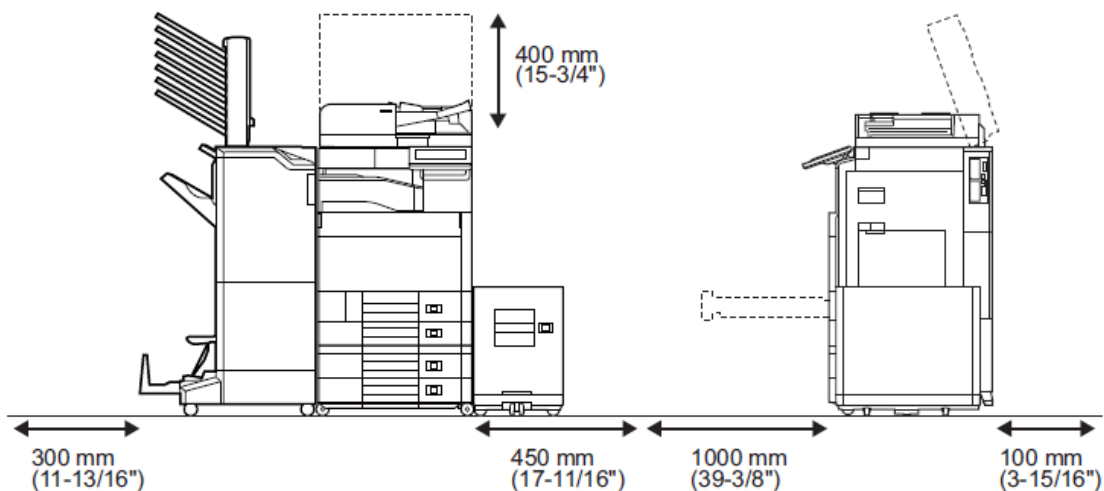

Machine front: 1000 mm/39 3/8" Machine rear: 100 mm/3 15/16"
Machine right: 450 mm/17 11/16" Machine left: 300 mm/11 13/16"
Machine top: 400mm/15 3/4"

**All Specifications Subject to Change without Notice.*

UTILITIES

Utility	DESCRIPTION
Kyocera NET Admin	Kyocera NET Admin is Kyocera's unified device management solution that uses a web-based platform to give network administrators easy control of all network enabled printing devices. Kyocera NET Admin is web-based, no client software installation is necessary.
Kyocera NET Viewer	Administrator Utility, which monitors Kyocera network devices with the ability to display and report device conditions via e-mail using SMTP.
Kyocera Net Direct Print	Allows Direct Printing of Adobe PDF's without launching Adobe's Acrobat or Acrobat Reader applications.
Quick Set-up Utility	Quick Set-up Utility for Network Administrators used to set-up IP Printing and Addresses on Network Printers.
FMU	The File Management Utility (FMU) distributes documents scanned on a multifunction print system (MFP) to specified network folders or computers. The user can set the criteria for distributing the scanned files. Advanced distribution criteria is available for certain MFPs.

HyPAS BUSINESS APPLICATIONS SUPPORTED

DESCRIPTION	
PinPoint Scan 3	Tiered Color Monitor
CentraQ	Google Connector
CentraQ Pro	Teaching Assistant
DocuWare Connector	RightFax Embedded
Xmedius FAX Connector	Microsoft Connector
AccuSender Send Secure	AccessLock
Accusender Fax	Square 9 Connector
AccuSender Powered by Biscom	OnBase Connector
AccuSender ShareBase	DMConnect (all)
Cloud Connect	Mobile Print
AutoStore	MyPanel
Embedded Terminal HyPAS for KNM	

See CopyStarCentral Solutions> HyPAS Applications for the latest versions

PRINT DRIVERS

Print Drivers can be downloaded from CopyStarCentral and kyoceradocumentsolutions.com. Drivers and Descriptions are periodically updated and versions available in the future may not match this chart.


Description	Version	Operating System
KX Driver (Generic)	6.3.0909	Win XP, Vista, Win 8, Win Server 2003
KX Driver	7.3.2216	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016
KX (XPS) Driver	2.3.2216	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016
PCL Mini Driver (Generic)	4.1	Win XP, Vista, Win 8, Win Server 2003
PCL Mini Driver	1.7	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016
KPDL Mini Driver (Generic)	8.1112	Win XP, Vista, Win 8, Win Server 2003
KPDL Mini Driver	8.1808	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016
Mac Installer	8.8210	OSX 10.9, 10.10, 10.11, 10.12
Linux	8.7114	Linux
Network Fax Driver	6.3.3812	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016
Twain and WIA Installer	Twain 2.0.9110 WIA 2.2.3028	Win7, Win8/8.1, Win10, Win Server 2008/R2/2012/R2/2016

PRODUCT CONFIGURATOR

The **Product Configurator** is available on CopyStarCentral by selecting Product and Services>A3 and one of the New MFP Models. Click on Configurator Link. Select the Category and choice a Model from the drop down.



2553ci/3253ci PRODUCT CONFIGURATION

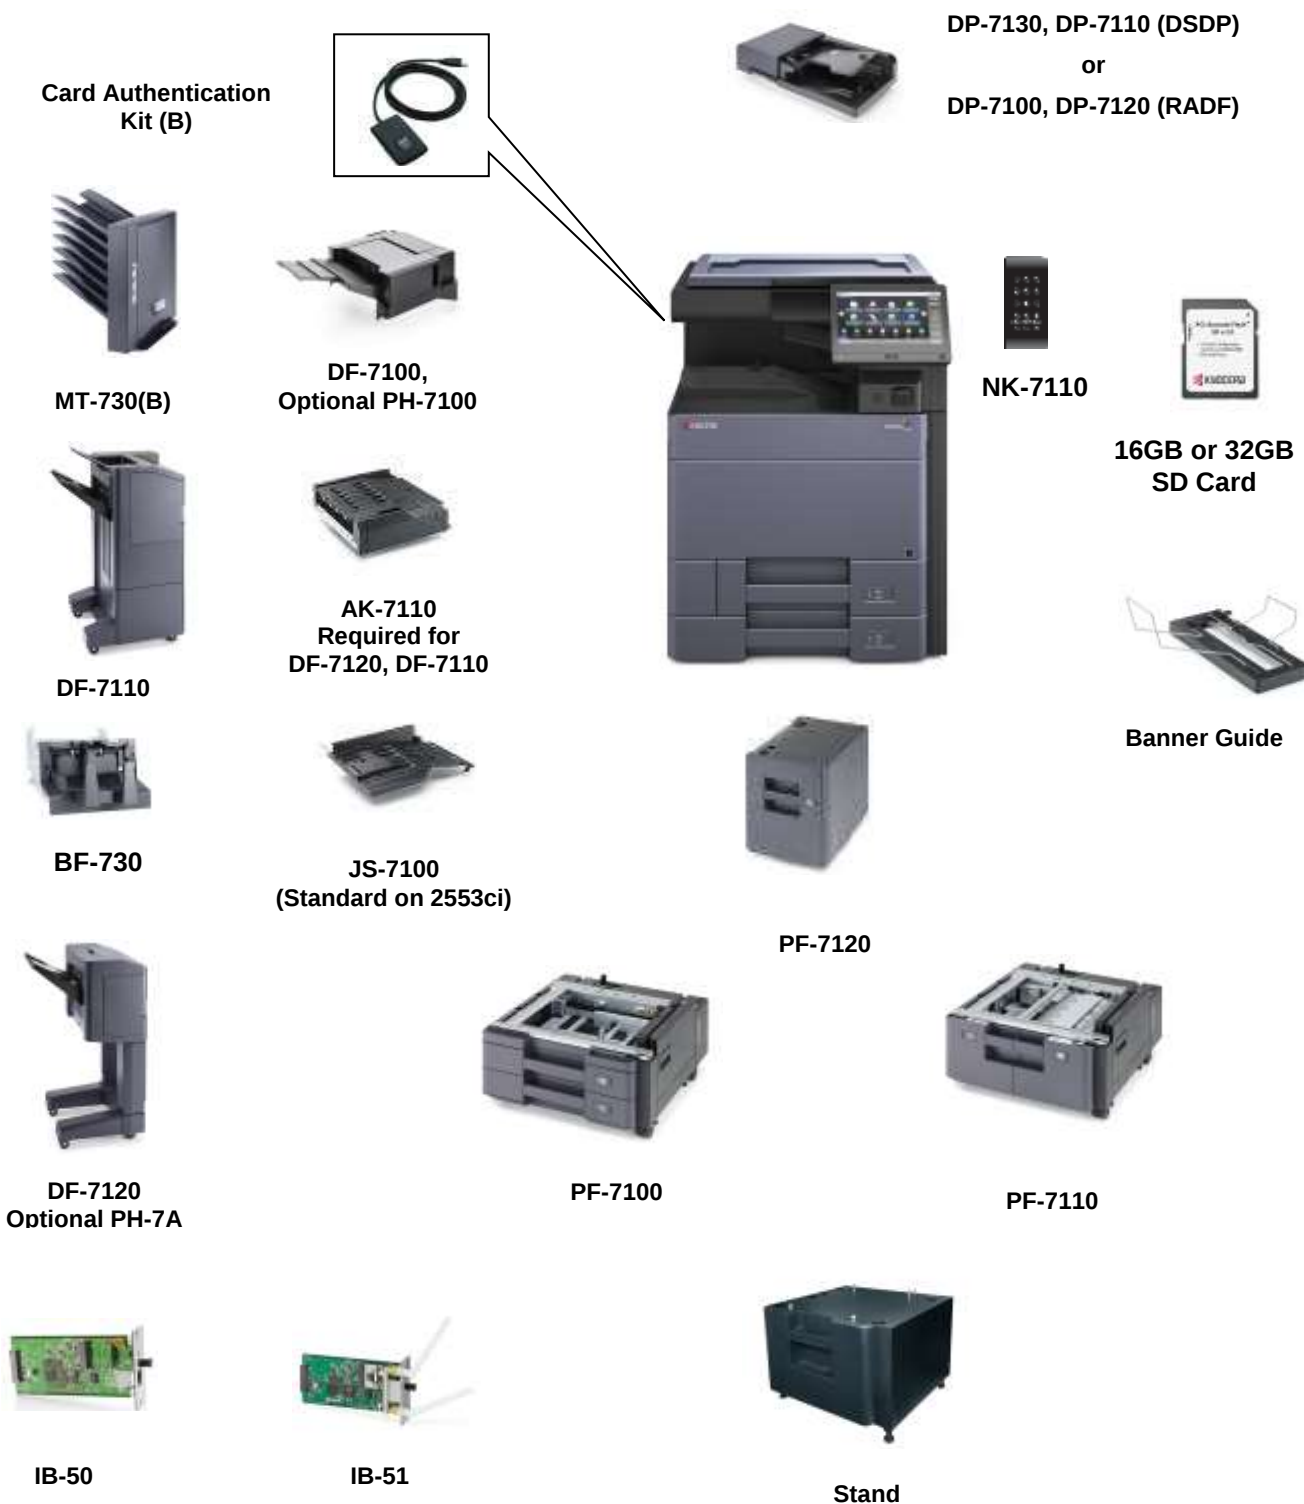

See Page 5 for a complete list of Accessories.

DIFFERENCES BETWEEN STANDARD IB-35 and OPTIONAL IB-51

	IB-35 Wi-Fi	IB-51 Wireless
Application standards(IEEE)	802.11 b/g/n	802.11 b/g/n
Wi-Fi Direct	Yes	No
Channels	1~13ch available	1~11ch fixed
Communication distance	30m	100m
Communication speed	20 [Mbps] (communication distance :1m)	84 [Mbps] (communication distance:1m) *limited by e-KUIO communication speed