



9104-M Manassas Drive  
Manassas, VA 20111  
703-369-2575 Fax 703-369-2653



## **Kyocera & Copystar Driver Installation Procedure**

Before installing drivers the network settings should be configured on the device.

To access the network menu on the machine go to “System Menu” then “System”. The equipment will ask for a user name and password (see the chart below). Select network and configure your DHCP, IPV4 & TCP/IP settings. After you have assigned an IP address to the equipment and restarted it you can access the web configuration menus from a computer on your network via a web browser (URL is the IP Address and password is “admin00”)

### **User Name and Password List** (the username and password will be the same)

FS-1820MFP – “1820”

FS-1128MFP – “2800”

FS-3140MFP – “3100”

CS-250ci – “2500”

CS-300ci – “3000”

CS-400ci – “4000”

CS-500ci – “5000”

CS-420i - “4200”

CS-520i - “5200”

CS-2560 – “2500”

CS-300i – “3000”

KM-3650w – “6482”

KM-4800w – “6482”

Drivers can be downloaded from [www.copystar.com](http://www.copystar.com). Select the product category, model and resource from the drop down menus (note older models will be under “Legacy Products”). The KX driver is recommended for most applications.

## DOWNLOAD CENTER

---

Find Device Drivers, Manuals, Specifications and Product brochures. Please select a product category, then select a product.  
Your product's model number can be found on the front face of the product or on the serial number tag found on the side or back of the machine.

### Product Category

Black & White Copier/MFP | Black & White MFP

### Product Model

CS 520i

### Select Resource Category

TECHNICAL RESOURCES

### Select Sub-Category


Print Drivers




---

| ▼ Date   | Name                                                                                                                                                                    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 03/08/10 |  <a href="#">KX Driver ver. 5.1.1405 x64 for Win XP, Vista, 2003, 2008, Windows 7</a>  |
| 03/08/10 |  <a href="#">KX Driver ver. 5.1.1405 x86 for Win XP, Vista, 2003, 2008, Windows 7</a>  |
| 03/08/10 |  <a href="#">KX Driver ver. 5.1.1405 x86 for Win XP, Vista, 2003, 2008, Windows 7</a> |


Run the downloaded file and accept the license agreement.

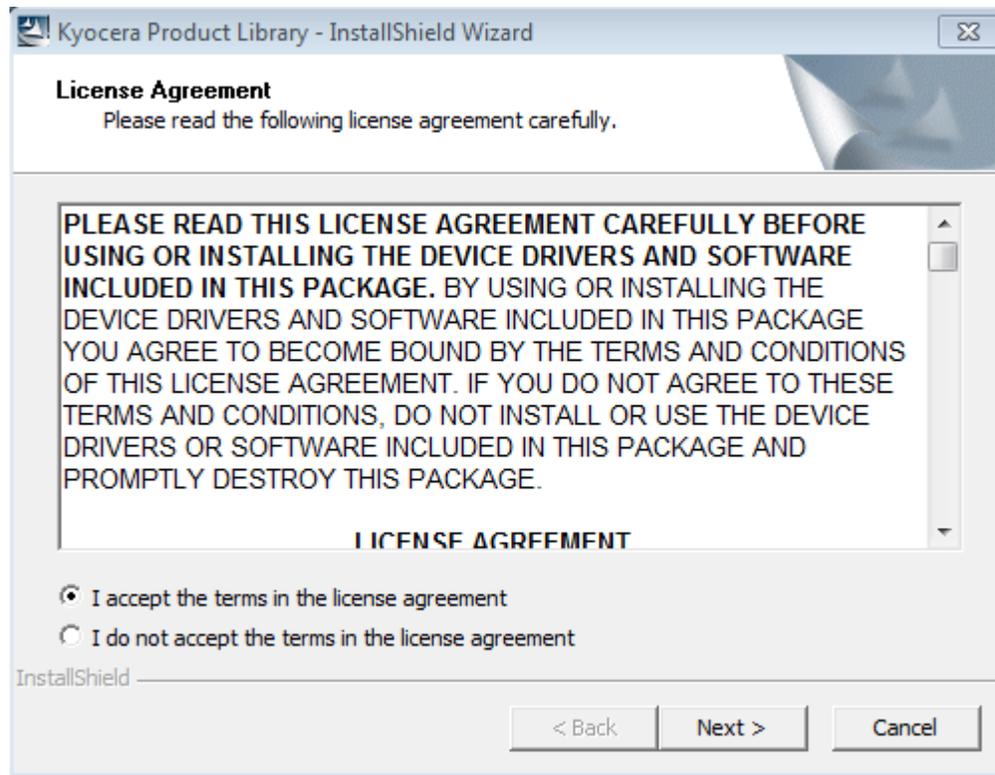


Choose a desired extraction folder or use the default selection.

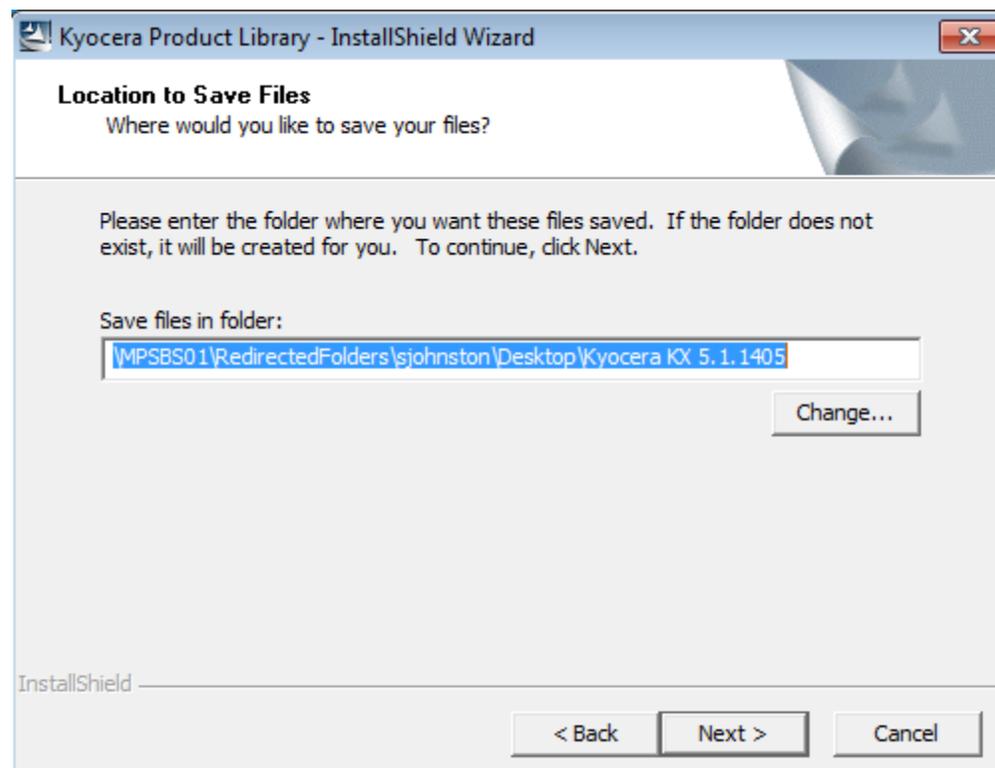


## Select the KX Driver for Installation

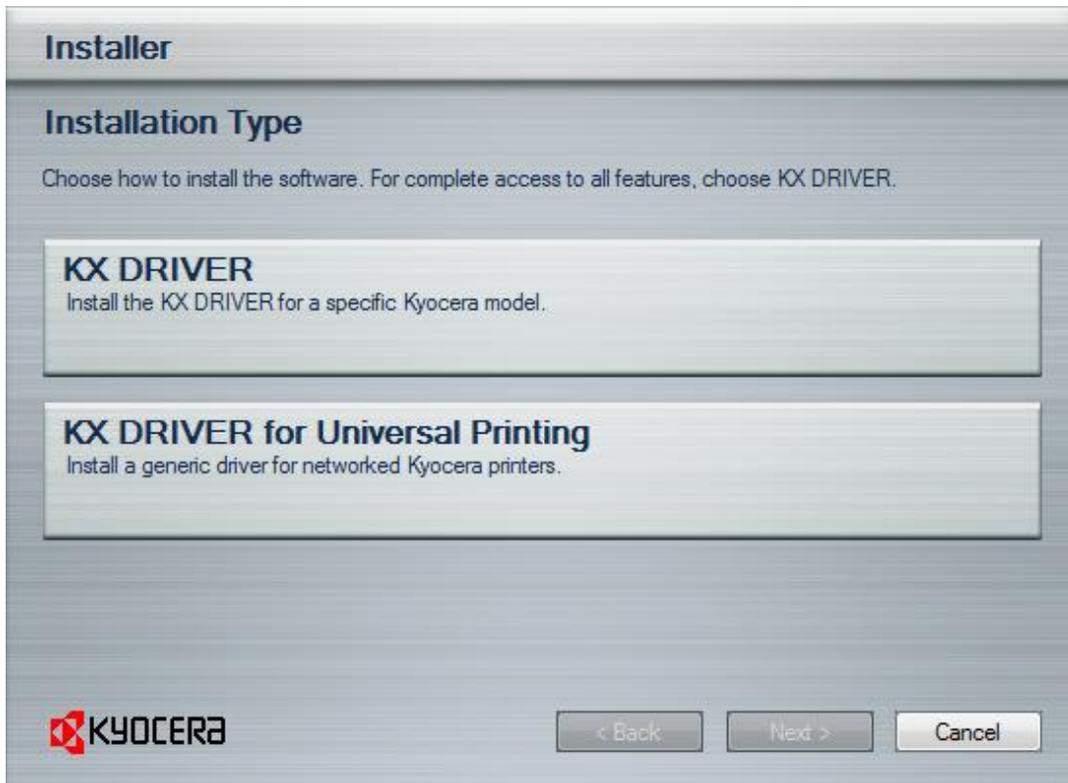


The installer should automatically find Kyocera device on your network if SNMP is configured and the PC is on the same subnet. If not the IP address can be entered manually by choosing “Custom select”. Click the device you want to install the driver for and click **Next**.

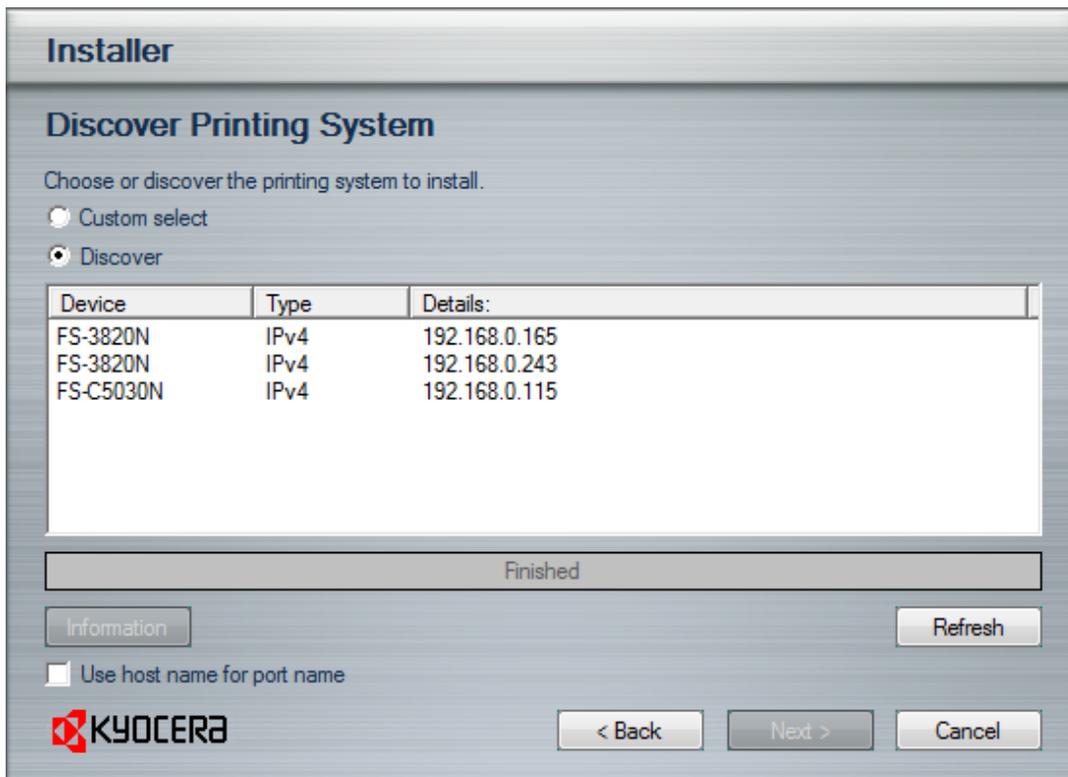


Keep the default setting and click **Next**.

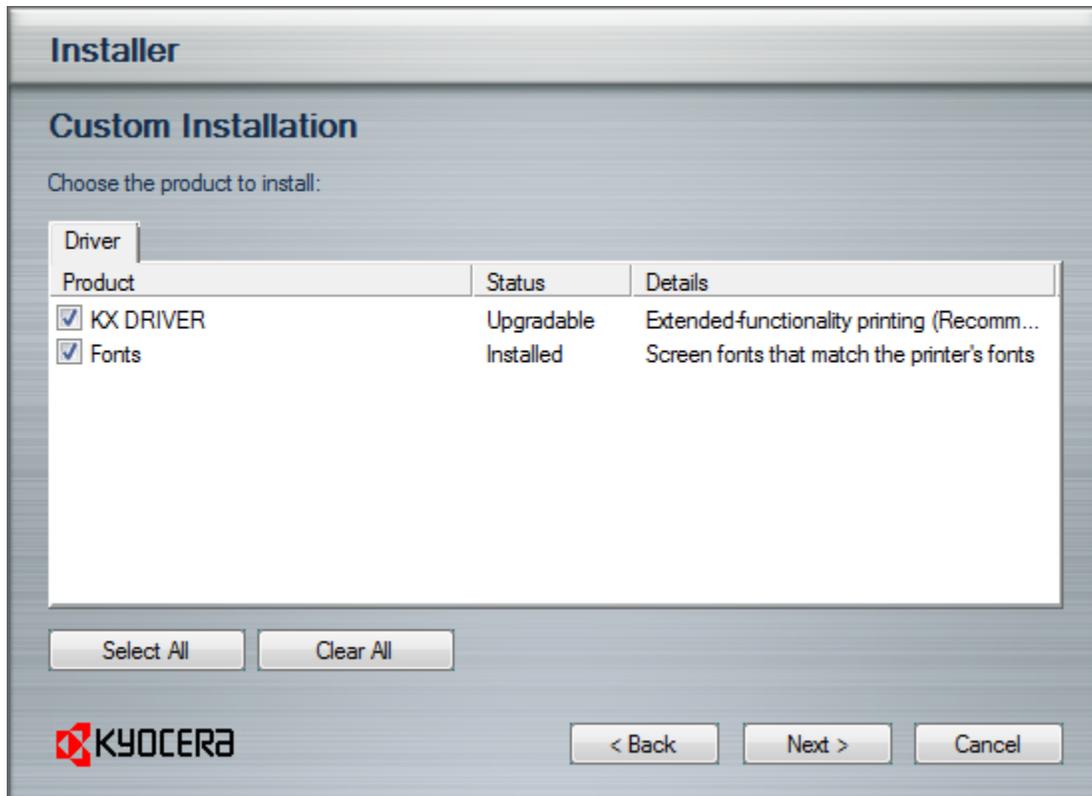


Configure printer settings and click **Next**.

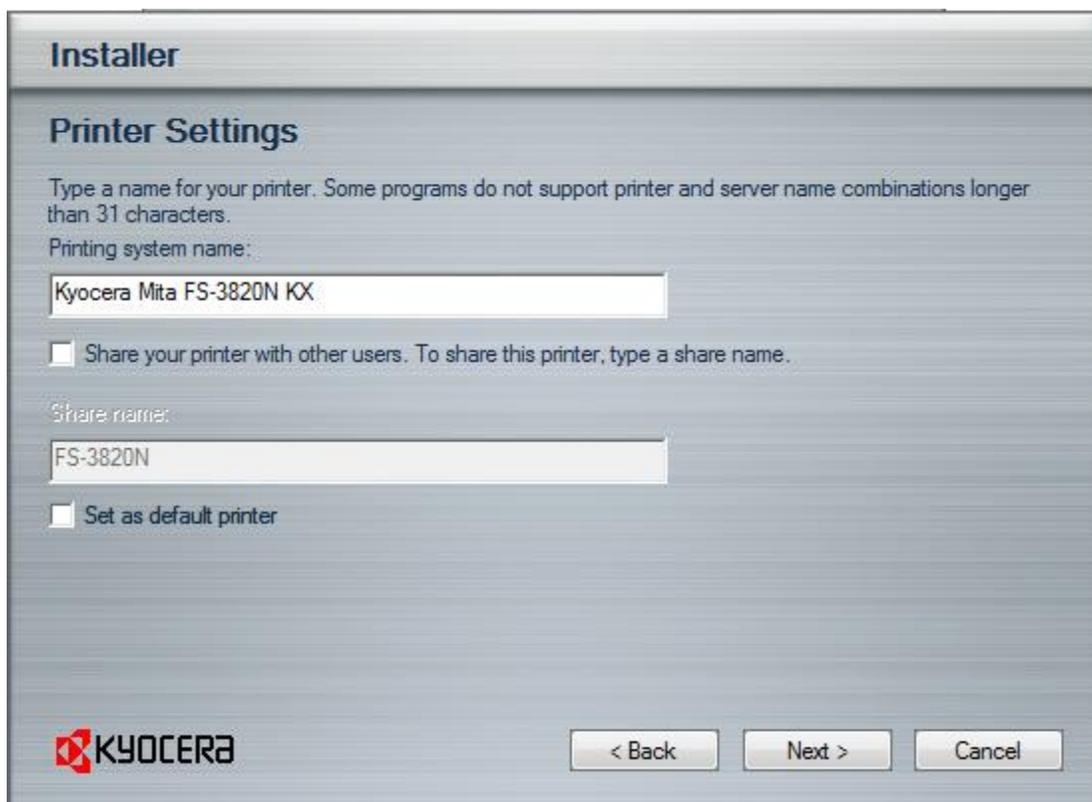


Click **Install**.

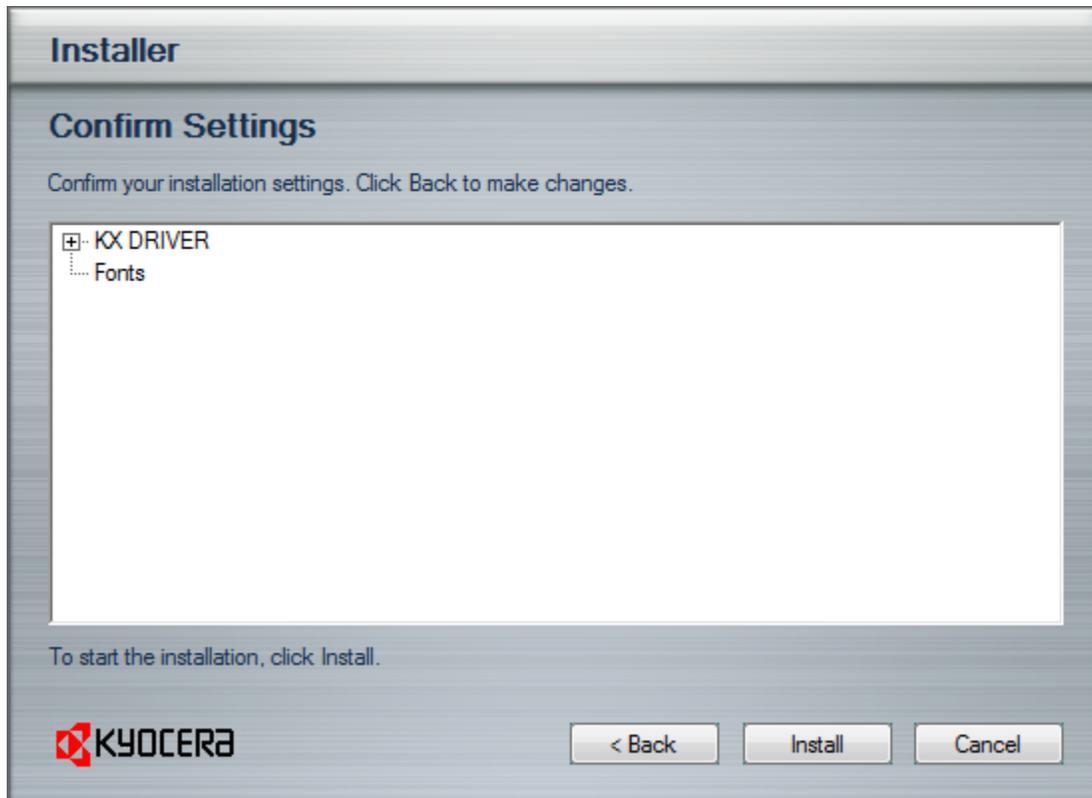


Click **Cancel**.

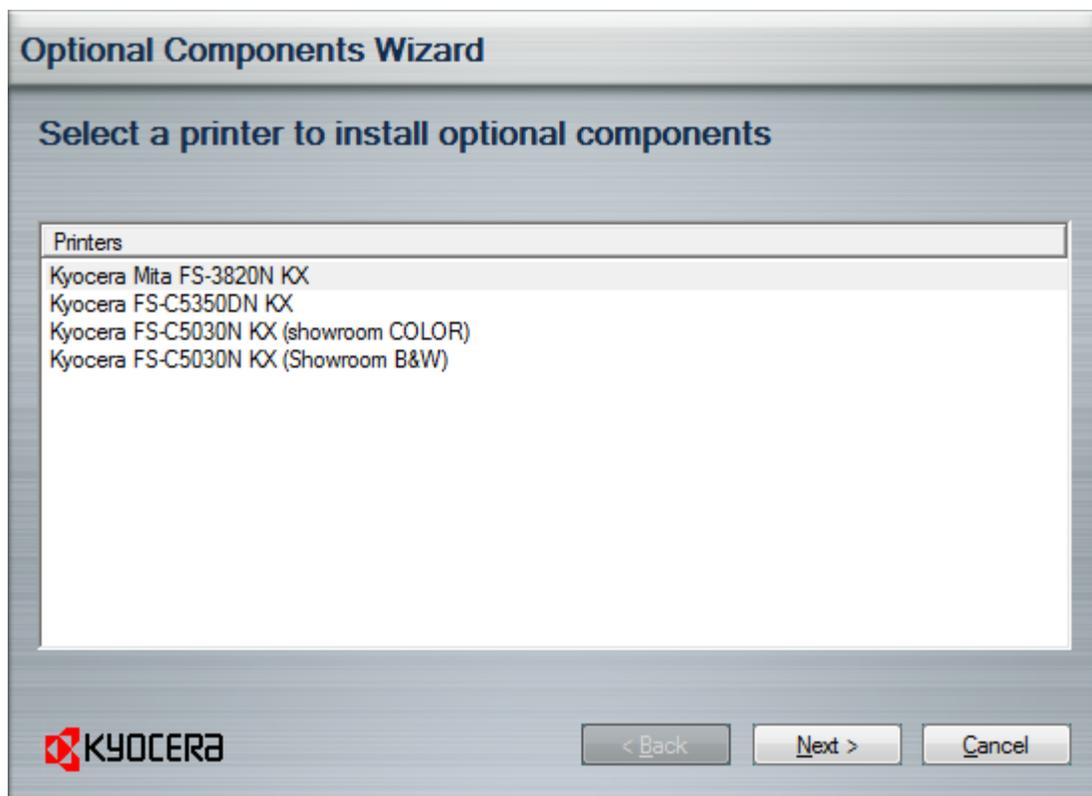

Click **Yes**.

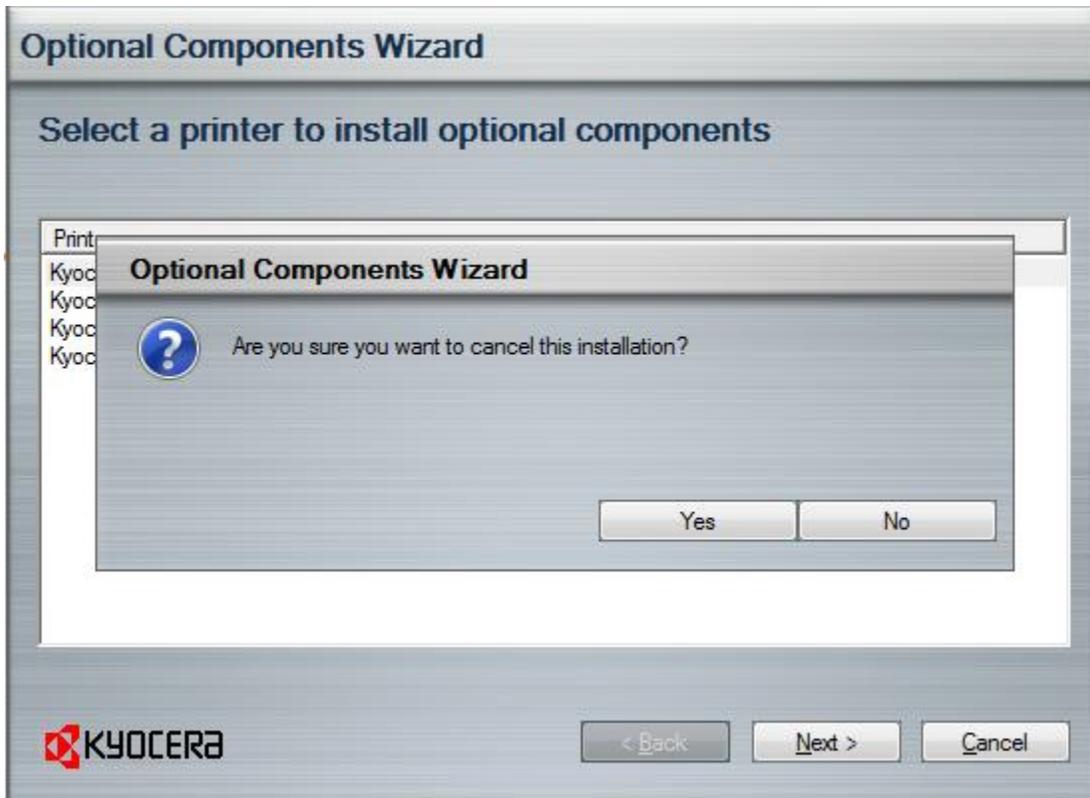

Check “Print a test page” and click **Finish**.

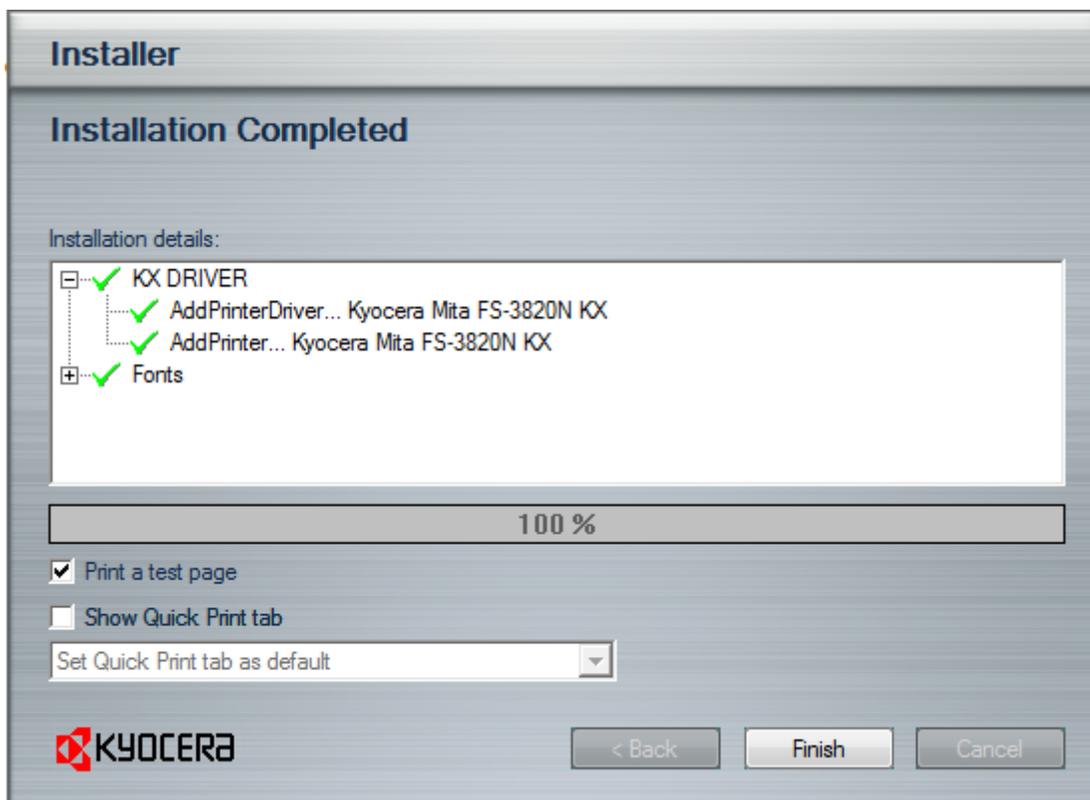

After the driver is installed it is important to configure the device settings. This can be accessed by viewing the printer properties and selecting the device setting tab. Chose “Auto Configure” to automatically update the device options.

