

SMB Scanning for Lexmark

Using "Scan to Network" Embedded Solution Application

Accessing the Embedded Web Server

Most configuration tasks will be performed through the Embedded Web Server on the device. To access the Embedded

Web Server:

1 Type the device IP address or hostname in the address field of your Web browser.

2 Use the navigation menu on the left to access settings and report menus.

Note: If the device IP address or hostname is not readily apparent, you can find it by printing a network setup page.

The screenshot displays the Lexmark X658de Embedded Web Server interface. At the top, the Lexmark logo is on the left, and the device name 'Lexmark X658de' is on the right, along with its IP address (192.168.0.242), contact name, and location. Below this, a 'Device Status' section shows 'Ready' and 'Tray 2 Empty' with a 'Refresh' button. A navigation menu on the left includes options like 'Device Status', 'Scan Profile', 'Copy Printer Settings', 'Settings', 'Reports', 'Links & Index', 'Applications', and 'Order Supplies'. The main content area shows 'Toner Status: Black Toner 100%' with a progress bar. Below that, a table lists paper input trays and their status, capacity, size, and type.

Paper Input Tray:	Status:	Capacity:	Size:	Type:
Tray 1	Empty	550	Letter	Plain Paper
Tray 2	Empty	550	Legal	Custom Type 2
Multi-Purpose Feeder	OK	100	Letter	Custom Type 6

Paper Output Bin:	Status:	Capacity:
Standard Bin	OK	500
Bin 1	OK	500

Printing a network setup page

1 From the printer home screen, touch **Menus >Reports >Network Setup Page**. After the network setup page prints,

the device will return to the home screen.

2 On the printout under TCP/IP, locate the IP Address or Fully Qualified Domain Name.

Configuring Scan to Network

Accessing the Scan to Network

1 From the Embedded Web Server, click **Settings**.

2 Click **Embedded Solutions**.


Ready
Tray 2 Empty
Refresh

Lexmark X658de
 Address: 192.168.0.242
 Contact Name:
 Location:



Device Status

Scan Profile

Copy Printer Settings

Settings

Reports

Links & Index

Applications

Order Supplies

Settings

Default Settings

- [General Settings](#)
- [Bookmark Setup](#)
- [Copy Settings](#)
- [Fax Settings](#)
- [E-mail/FTP Settings](#)
- [Print Settings](#)
- [Paper Menu](#)

Other Settings

- [Network/Ports](#)
- [Update Firmware](#)
- [Security](#)
- [E-mail Alert Setup](#)
- [Manage Shortcuts](#)
- [Intervention Management](#)
- [Import/Export](#)
- [Embedded Solutions](#)

3 From Installed Solutions, click [Scan to Network](#).


Ready
Tray 2 Empty
Refresh

Lexmark X658de
 Address: 192.168.0.242
 Contact Name:
 Location:



Device Status

Scan Profile

Copy Printer Settings

Settings

Reports

Links & Index

Applications

Order Supplies

Solutions
System
Network License

Install
Uninstall
Start
Stop

	Icon	Name	Version	Status	License
<input type="checkbox"/>		MyShortcut	1.1.0	Running	None Required
<input type="checkbox"/>		Orders Routing	2.1.0	Running	None Required
<input type="checkbox"/>		Remote Operator Panel	2.1.0	Running	None Required
<input type="checkbox"/>		Scan to Hard Disk	2.1.0	Running	Licensed
<input type="checkbox"/>		Scan to Network	3.2.0	Running	Unlicensed
<input type="checkbox"/>		USB My MFP Application	2.1.0	Running	None Required

4 Click [Configure](#)


Ready
Tray 2 Empty
Refresh

Lexmark X658de
 Address: 192.168.0.242
 Contact Name:
 Location:



Device Status

Scan Profile

Copy Printer Settings

Settings

Reports

Links & Index

Applications

Order Supplies

Solutions
System
Network License

Scan to Network

Information
Configure
License


Description

This application scans a document and saves it in a network folder.

Version	3.2.0
Vendor name	Lexmark International, Inc.
Vendor email	support@lexmark.com
Vendor web site	www.lexmark.com
Vendor phone	See "Contact Us" on www.lexmark.com for your country.
Vendor support	click here

4 Under Scan Destination, click [Add](#)

Configuring destination settings

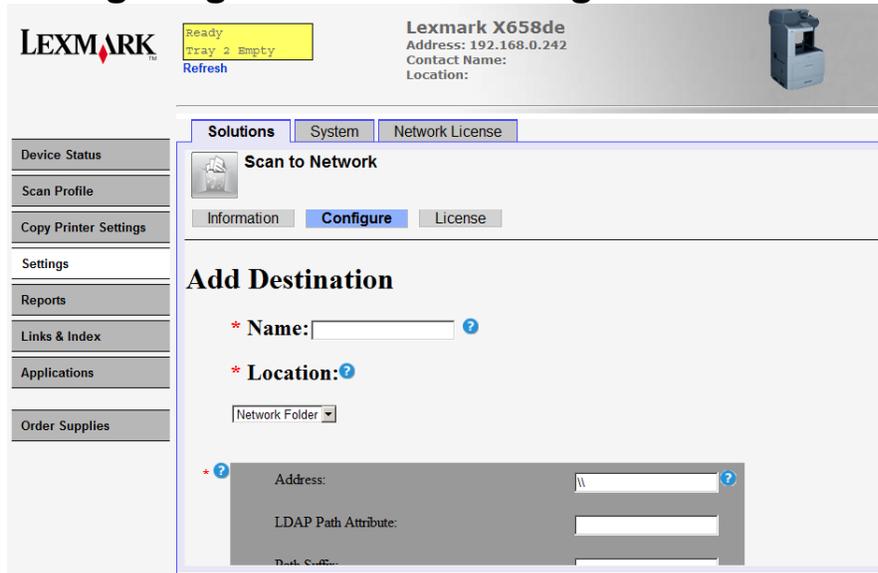

Name

Type a name for the destination.

Location

Select **Network Folder**

Network Folder

Address Type the server name or IP Address of the network folder in the `\\server\share` format.

Domain Type the Windows domain for the destination if the destination resides within a different Windows domain than the printer.

WINS Server Type the WINS Server address if the printer has difficulty connecting with a network folder destination.

File


Note: To avoid errors, make sure you select either **Append time stamp** or **Over-write existing file**.

Name Type a default base name for the scan file. The file extension is generated automatically according to the value of the Format field in the Scan Settings section. (ex. "DOC_" or "Scan_")

Allow user to enter file name Allow users to override the default file name.

Append time stamp Add a time signature to the file name when saving a file.

Over-write existing file Automatically replace an existing file of the same name.



Authentication Options:

- Guest
- Use MFP authentication credentials
- Prompt for username and password
- Use static username and password

Username:

Password:

**Use Static Username and Password

Scan Settings: ?

The selected settings can be changed by the MFP user

- Paper Size:
- Orientation: Portrait Landscape
- Content:
- Sides (Duplex):
- Format:
- Resolution:
- Color: On Off

Custom Job: On Off

Edge to Edge: On Off

Contrast:

Darkness:

Shadow Detail:

Background Removal:

Scan Preview:

* File:

Note: Filename has a 255 character limit.

Name: ?

Allow user to enter file name

Append time stamp

Over-write existing file

Other Options: ?

Enable basic XML index file

Allow user to navigate through folders

Allow user to create folder

Start in username folder (create if it doesn't exist)

Scan Confirmation Page:

Print Confirmation Page:

*** Required fields**

OK

Cancel